Another helpful tool in seedbed preparation.

Landscapers, nurseries and general contractors find our 20 and 30 Series Pulverizers ideal for leveling and seedbed preparation.

Land Pride Soil Pulverizers aggressively rip into crusted soils with reversible scarifier shanks. The full width pulverizing roller features 3/8" x 1 1/4" heat treated steel spikes with replaceable wear sleeves. The down pressure springs keep the roller in constant contact with the soil and the leveling H-beam redistributes freshly loosened soil for an even seedbed.

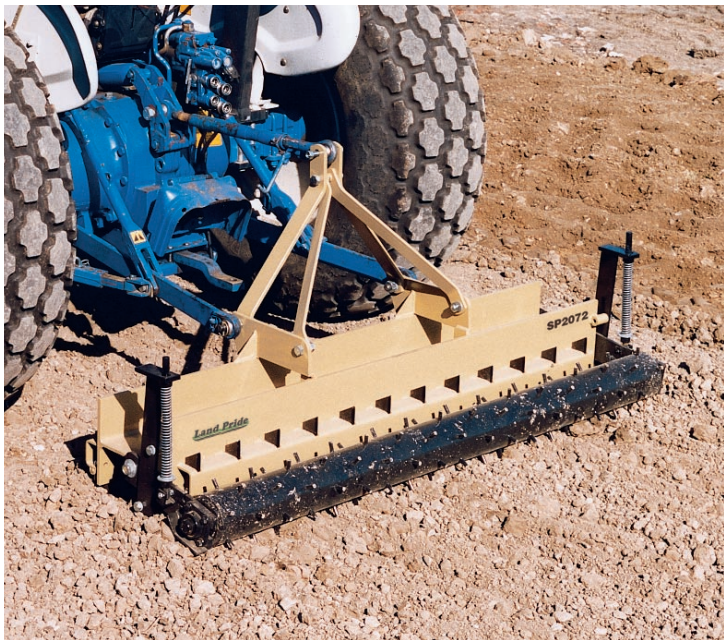

SP20 SERIES

25 - 35 HP — 60" 72"

QUICK HITCH SYSTEM

- Cat. 1 hitch
- Single steel spiked roller with replaceable heat treated sleeves
- Heavy wall round tubing on roller
- Self-aligning cast 1" bearings with double lip seals
- 10" Frame beam
- 1" Diameter shaft in roller

3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.

Which Pulverizer is right for you ?

MAXIMUM HORSEPOWER

20 SERIES	**30** SERIES
35 HP	50 HP

Aggressive Scarifier Shanks

10 1/2" x 2" x 1/2" Scarifier shanks aggressively rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting.

Not All Pulverizers Are Created Equal!

Steel Spikes — Be sure to look for wear sleeves which extend the life of your roller. Are the steel spikes easily replaced? Ours are!

Spring Loaded Roller — The spring loaded roller keeps the roller "pushing" towards the ground for constant pulverizing action. Our springs are set at 32 lb./inch!

Scarifier Shanks — Too wide and they bulldoze, too narrow and they bend or break. Just right when they are Land Pride! Ours are also reversible for twice the wear life.

SP30 SERIES

30 - 50 HP — 72″ 84″

The 30 Series Pulverizer is available with single or double spiked rollers to break up tough soil conditions. The second roller can also be easily added later with no wasted parts.

- Cat. 1 hitch
- Formed plate A-frame
- Heavy-duty clevis type lower hitch
- Single or double steel spiked roller
- Replaceable heat treated sleeves
- 3/8″ steel spikes
- Self-aligning cast 1″ bearings with double lip seals
- 12″ H-beam frame
- 1″ Diameter shaft in roller

Soil Pulverizer Specifications

Model/Series	20 Series		30 Series	
Hitch	Cat. 1		Cat. 1	
H-Beam (mm)	10" (254)		12" (304.8)	
A-Frame (mm)	1 /2" x 2 1/2" Flat Bar (12.7 x 63.5)		3/8" Plate (9.5)	
Working Width (cm)	60" (152)	72" (182)	72" (182)	84" (213)
Weight - with single roller lb. (kg)	491 (223)	561 (255)	671 (305)	721 (328)
Max. Engine HP	35 HP		50 HP	
Front to Back Length - single roller (cm)	24" (60.9)		27 1/4" (69.2)	
Front to Back Length - double roller (cm)	32" (81.3)		35 1/4" (89.5)	
Height (cm)	36 1/2" (92.7)		36 1/2" (92.7)	
No. of Scarifier Shanks	21	25	25	29
Size of Scarifier Shanks	10 1/2" x 2" x 1/2" Reversible or, 10 1/2" x 1/2" x 1/2" Reversible		10 1/2" x 2" x 1/2" Reversible or, 10 1/2" x 1/2" x 1/2" Reversible	
Shank Spacing (mm)	2 13/16" (71.44)		2 13/16" (71.44)	
No. of Spikes - single roller	86	103	103	116
No. of Spikes - double roller	N/A	N/A	206	232
Spiked Roller Tube Diameter (mm)	5 9/16" O.D. (141.2)		6 5/8" O.D. (168.2) (opt. 2nd roller 5 9/16" (141.2)	
Spike Material (mm)	3/8" x 1-1/4" (9.5 x 28.5) Steel, replaceable heat treated sleeves			
Springs - Front Roller (kg/cm)	32 lbs./inch (14.5/2.54)		32 lbs./inch (14.5/2.54)	
Springs - Rear Roller (kg/cm)	N/A		15 lbs/inch (6.8/2.54)	

Maximum HP Rating based on 2WD specifications.

* See dealer for complete warranty information.

Models may or may not include options.
Design and specifications subject to change without notice.